


# FLOOR HEATING CABLE COMFORT & SPACE HEATING

Effective: FEBRUARY 1, 2011

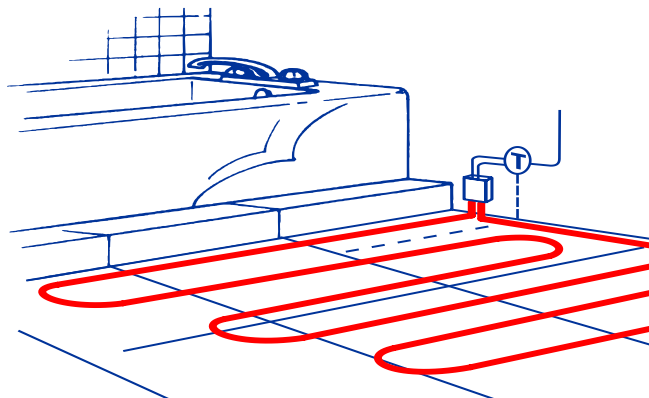

## HEAT TRACING CABLE

CAT.NO.	APPROX. WATTS IN CONCRETE/		VOLTAGE VAC	WEIGHT		PRICE	
	FT	M		KG/M	LB/FT	M	FT
6CCA-1BA	9	30	120	0.14	0.10	24.55	7.48
6CCA-2BA	9	30	240	0.14	0.10	24.55	7.48
8CCA-1BA	12	39	120	0.14	0.10	27.02	8.24
8CCA-2BA	12	39	240	0.14	0.10	27.02	8.24
5FPS-1BT	8	26	120	0.14	0.10	34.59	10.55
5FPS-2BT	8	26	240	0.14	0.10	34.59	10.55
8FPS-1BT	12	39	120	0.14	0.10	38.33	11.69
8FPS-2BT	12	39	240	0.14	0.10	38.33	11.69

## COMPONENTS

CAT.NO.	DESCRIPTION	STD PKG	WEIGHT		PRICE
			KG	LB	
MSPS/GRK-E	CABLE SEAL AND END SEAL	1	0.03	0.07	39.64
GRK-E-5/1	HEAT SHRINK END SEAL KIT	5/1	0.11/0.02	0.24/0.04	35.63/14.26
MSPS-5/1	MOLDED SILICONE RUBBER POWER SEAL KIT	5/1	0.11/0.02	0.24/0.04	50.79/25.39

## CONTROLS

CAT.NO.	DESCRIPTION	WEIGHT		PRICE
		KG	LB	
TH114-AF-XGB	Thermostat, non programmable, 15A, X=120 or 240V, 1800W/3600W, 15mA GFCI with LCD display	0.40	0.88	263.66
TH115-AF-XGB	Thermostat, programmable, 7 days, 15A, X=120 or 240V, 1800W/3600W, 15mA GFCI with LCD display	0.40	0.88	323.37
TH114-AF-12VDC	Thermostat, non programmable, master 12VDC with LCD display	0.40	0.88	153.48
TH115-AF-12VDC	Thermostat, programmable, master 12VDC with LCD display	0.40	0.88	213.44
CT230-240GFCI	Slave unit, 15A, 120/240V, 1800W/3600W, 15mA GFCI	0.40	0.88	184.98

**Caution:** The use of GLCB'S is required at all times for all heat trace applications.