

E COMPONENTS AND ACCESSORIES

CLASS I DIVISION 1 CONNECTION KITS

Serge Baril's HA Series connection kits include all components necessary to complete the installation of Serge Baril's full line of Class I, Division I heat tracing cables. The selection tables below allow for the proper specifying of the complete connection kit assembly (ex.: HAP-3).


HA-	-	I	Pipe size		
			inches	mm	
			Pipe clamps		
			3	.75 - 2.5	19 - 63
			12	3.0 - 10.0	75 - 250
			20	12.0 - 20.0	300 - 500

Specify kit configuration	
P	Power Connection
S	Splice Connection
T	Tee Connection
E	End Connection
SBA	Includes seals to do four complete connections of any of the above. Customer to provide approved fittings as per instruction sheets. Pipe clamps not provided.

Important Note: FPS and SCS families of products are approved by CSA for Cl. I Div. 1 applications with the use of these components. For other than CSA approval (FM, UL) the D1-FPS, D1-SCS version of the heater is required with these components.

TERMINAL BLOCK


Special floating three-point terminal block can be used in any enclosure to provide positive, sure electrical connections. It is rated at 40 amps. 440 VAC. Requires no lugs.



MOUNTING ADAPTOR FOR TUBING

Used to mount the base of Serge Baril connection devices on to tubing or small diameter pipe.

MAP

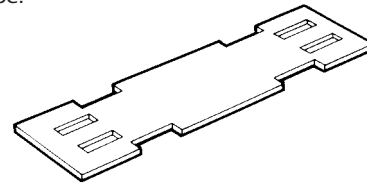

PILOT LIGHT FOR END OF CIRCUIT

Serge Baril PST-PLK end kits can be supplied to provide an end-of-circuit continuity light.

PST-PLK-	-	I
120V		
208V		
240V		
277V		

Pipe clamps	inches	Pipe size	mm
3	.75 - 2.5	19 - 63	
12	3.0 - 10.0	75 - 250	
20	12.0 - 20.0	300 - 500	

TANK ADAPTOR

TAP

Bracket used to mount the base of Serge Baril connection devices directly to the wall of a tank or vessel.

